


upTop SPAN TOWERS




Aluminium Alloy Scaffold System

- Designed To Meet The Highest Standard Of Quality and Safety. Easy Accessibility & Flexibility To Tackle Difficult Site Condition.
- Conforming To BS1139 Part 3 1994.
(Implementation of HD1004)

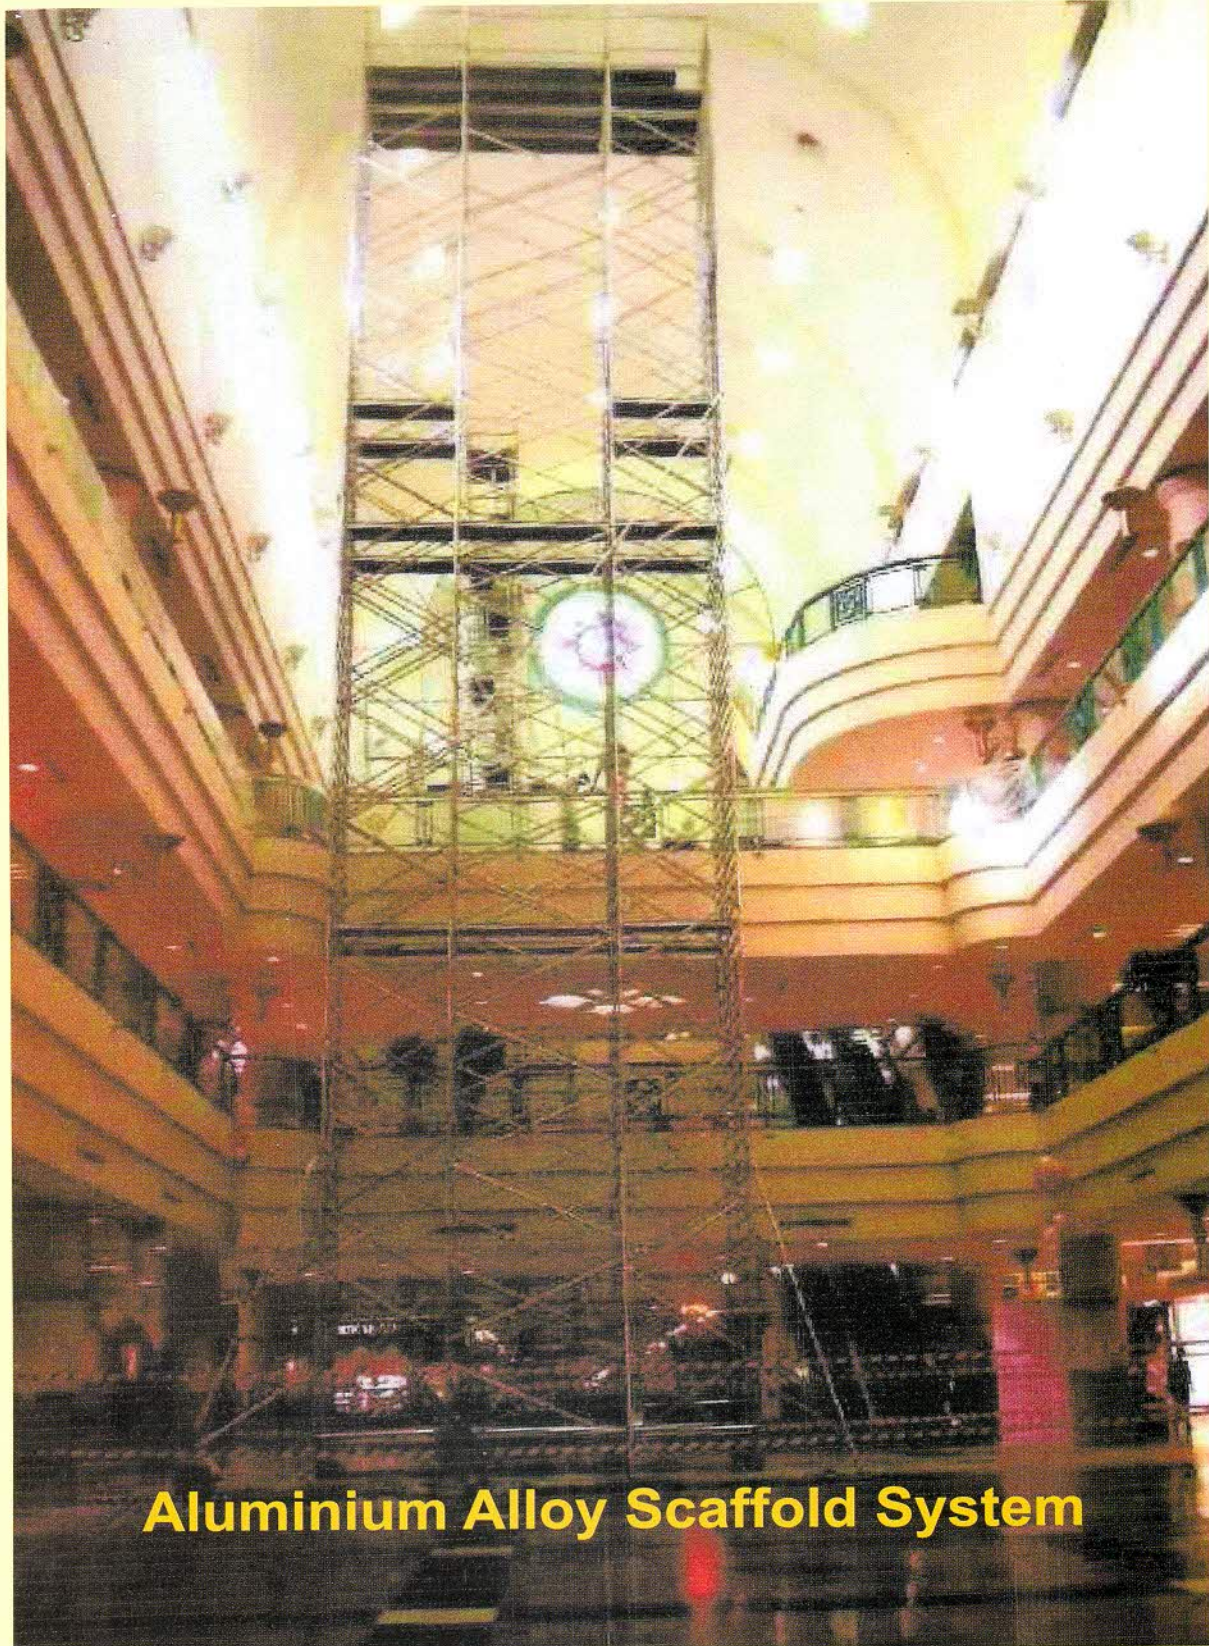


Certificate No: _____

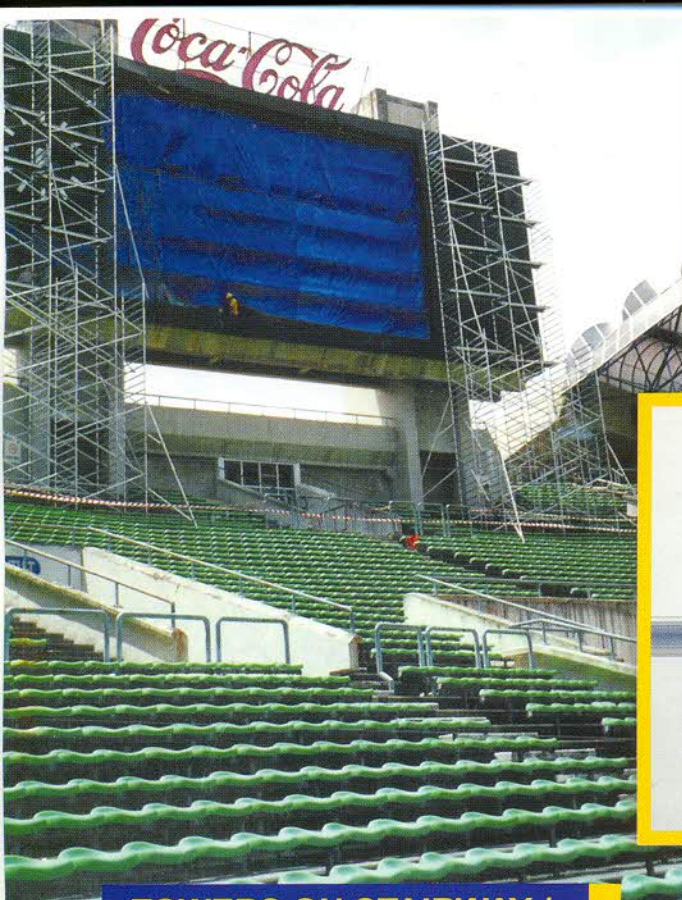


■ Solid Cast Spigot careful designed to enable easy fit and smooth dismantle operation.

Solid Cast T-Joints prevent misalignment to horizontal rungs and greater capacity for heavy load.

TOWERS IN ACTION

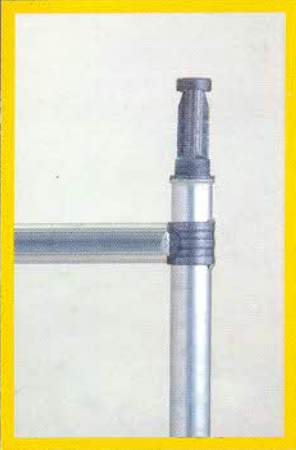

ACCESS LADDERS COME WITH LANDING PLATFORM

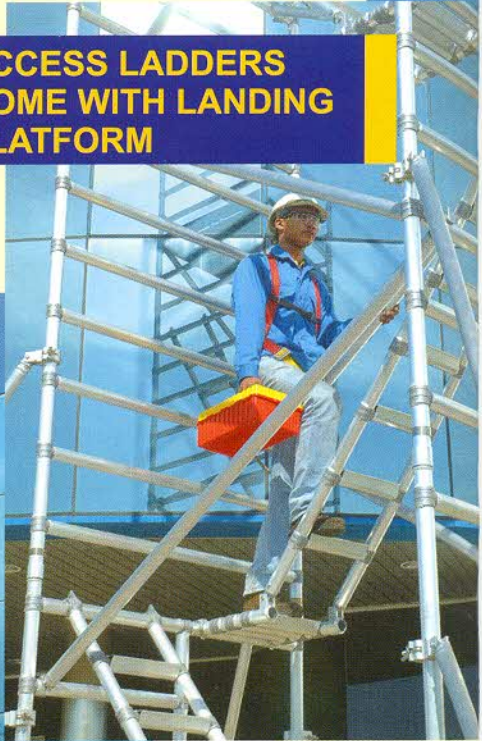

TOWERS ON STAIRWAY / GRANDSTAND



EASY FRONT ACCESS



■ Special designed adjustable leg with Carbon Spring at upper tip end enhance stability from tower base & enable the leg to retain firmly with the frame for easy assembly.

8 inches (200 mm) castor for easy Push & Roll.

LARGE OPENING



SPOTLIGHT TOWERS COME WITH BARRICADE



Solid Cast Self Locking braces hooks come with ergonomically designed release latch.

Spring and Self-Lock Pin used are of Stainless Steel for long lasting usage.

Complete Range Of Standard, Medium and Long Outrigger (Stabilizers).

Come With Rubber Swivelling Base Foot Enable Greater Friction Contact With Ground.



Access Frame design to enable front entrance.

Slanted Ladders comewith 80mm deep Serrated Surface Step & Landing Platform.

TOWERS COME WITH CANTILEVER PLATFORM



SCAFFOLD COMPONENTS



Double width Extension frame width size 1.35m

Height m	1.00	2.00
Weight kg	6.7	10.9



Single width Extension frame width size 0.75m

Height m	1.00	2.00
Weight kg	5.1	8.3




Guard rail frame

Width m	0.75	1.35
Weight kg	4.2	5.7



Access frame width size 1.35m

Height m	2.00
Weight kg	10.5

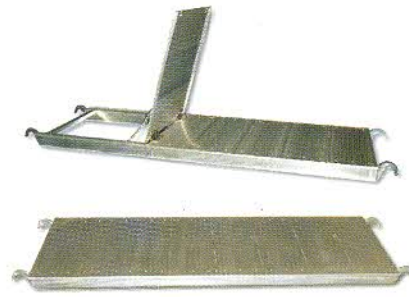

Platform with or without trapdoor

Height m	1.80	2.45	3.00
Weight kg	13.0	19.0	22.0



Ballast Weight (20 kg)



Parallel Coupler
Weight kg 0.5

Foldable Slanted steps c/w landing platform

Height m	2.00
Weight kg	11.6



Outriggers ~ length 2.5m, 3m & 5m

Length m	2.5	3.0	5.0
Weight kg	6.0	7.4	14.1



Swivel Coupler
Weight kg 1.2



Horizontal braces

For scaffold Length m	1.80	2.45	3.00
Weight kg	2.0	2.5	3.0



Diagonal braces

For scaffold Length m	1.80	2.45	3.00
Weight kg	2.3	2.8	3.3



Height adjustable leg & swivel castor with arrester brake

Castor Diameter	200mm
Weight kg	6.0



Side rail - (Bridge link)

For scaffold Length m	1.80	2.45	3.00
Weight kg	5.2	6.3	7.5



Toe Board

Dimension	0.75 X 1.8 or 2.45
	1.35 X 1.8 or 2.45

D I S T R I B U T O R

