

## CONCRETE GRINDER

### Applications:


- Removing paint, pebble Crete in concrete (not epoxy applied), stains, tar, rubbery compounds, mortar dropping and ceramic. Tile mortar residue, stencilcrete.
- Not suitable for terrazzo or marble.

### Features:

- Easy to use.
- Can be wet.
- Diamond stones to ensure long lasting.
- Single phrase Electric Motor to ensure conveniences in any job site.
- Sturdy Built Body to ensure durable.
- Grinding Width of 14" (inches) for job efficiency.
- Diamond stones can be replaceable.

### Optional:

#### Metal Bond Diamond



50#

100#


Model	Segments Size	Grit	Working Type
3-T3	3* Ø12 * 12	50#   100#	Dry

### Optional:

#### Resin Polishing Pads



Model	Segments Size	Grit	Working Type
XY-XZ	Diameter Ø3 inch Thickness: 10mm	#50	#100
		#200	#400
Dry Polishing			

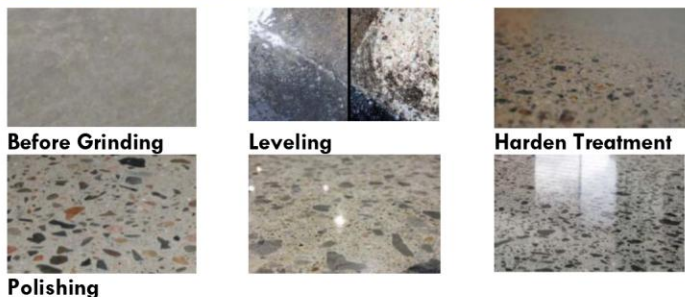

4 x Magnetic Pad Holder

Standard Machine  
exclude Grinding Pads.

Model	TKCG-410
Working Width (mm)	500
Rotating Speed (rpm)	450 ~ 1680
Tool Holder Diameter (mm)	280 x 4
Voltage	415v/50Hz
Power (KW)	5.5
Weight (kg)	185
Dimensions (LxWxH) (mm)	900 x 400 x 1100