

ELECTRIC MOTOR DRIVE

AS0812E (Indoor Use / Outdoor Use)


- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

| PRODUCT SPECIFICATION | AS0812E | AS0812 |
|--------------------------------|-----------|-------------|
| Platform Capacity | 450kg | 450Kg |
| Capacity On Deck Extension | 113kg | 113Kg |
| Platform Occupants (Indoor) | 2 | 2 |
| Work Height | 10m | 10m |
| Overall Length | 2.42m | 2.42m |
| Overall Width | 1.18m | 1.18m |
| Overall Height - Rails Down | 1.73m | 1.73m |
| Overall Height - Rails Up | 2.30m | 2.3m |
| Platform Extension | 0.9m | 0.9m |
| Drive Speed (Lowered/Elevated) | 4/0.8km/h | 3.5/0.8Km/h |
| Lift / Lower Time | 35/40sec | 35/40sec |
| Gradeability | 25% | 25% |
| Max. Slope | 1.5°/3° | 1.5°/3° |
| Machine Weight | 2,715kg | 2,691Kg |

HYDRAULIC MOTOR DRIVE

AS0812 (Indoor Use / Outdoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- Higher driver comfort and security

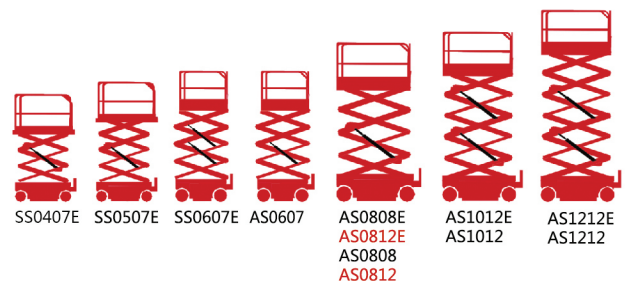

LINGONG GROUP JINAN HEAVY MACHINERY CO., LTD.

Factory address: Lingong Industrial Park, No. 2676, Kejia Road, Jinan Innovation Park
Email: sales@lgmg.com.cn (Overseas)

Manufacturer's Representative for ASEAN

OMNI MACHINERY PTE LTD

31 Gul Drive Singapore 629479
info@omni-machinery.com
Http://www.omni-machinery.com